


getopt1.c

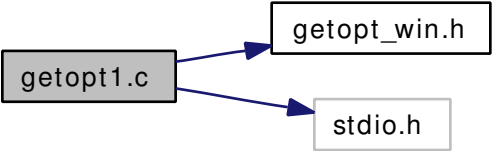

```
graph LR; getopt1_c[getopt1.c] --> getopt_win_h[getopt_win.h]; getopt1_c --> stdio_h[stdio.h];
```

A diagram illustrating the dependencies of the file `getopt1.c`. The file `getopt1.c` is represented by a gray rectangular box on the left. Two blue arrows originate from the right side of this box. The top arrow points to a white rectangular box labeled `getopt_win.h`. The bottom arrow points to a white rectangular box labeled `stdio.h`. The boxes for `getopt_win.h` and `stdio.h` have black borders, while the box for `getopt1.c` has a thick black border.

getopt_win.h

stdio.h